

E

D

Hardware Set 01 - (NEW SECURE VESTIBULE PAIR)					
2	EA	CONT. HINGE	112HD	628	IVE
1	EA	DOOR CORD	788-18	626	SCE
1	EA	KEYED REMOVABLE MULLION	KR4854	689	VON
1	EA	PANIC HARDWARE	LD-35A-EO	626	VON
1	EA	ELEC PANIC HARDWARE	UX-RX-QEL-35A-NL-OF-388	626	VON
1	EA	MORTISE CYLINDER	SFIC MORTISE CYLINDER HOUSING AS REQUIRED	626	SCH
1	EA	RIM CYLINDER	SFIC RIM CYLINDER HOUSING AS REQUIRED	626	SCH
1	EA	90 DEG OFFSET PULL	819HD 10"	630	IVE
1	EA	SURFACE CLOSER	4111 SCLSH	689	LCN
1	EA	SURF. AUTO OPERATOR	9542 DD MS	689	LCN
1	EA	MOUNTING PLATE	4110-18	689	LCN
1	EA	ACTUATOR, WALL MOUNT	8310-855	630	LCN
1	EA	ACTUATOR, WALL MOUNT	8310-856	630	LCN
1	EA	WALL STOP	WS408407CVX	630	IVE
1	EA	PUSH BUTTON	62IAL	629	SCE
			(TO BE MOUNTED IN OFFICE FOR REMOTE RELEASE)		
1	EA	POWER SUPPLY	PS802 900-2RS	LGR	VON
			CARD READER BY OTHERS		
			SEALS BY DOOR SUPPLIER		

NEW DOORS IN EXISTING FRAME. AUTO OPERATOR AND ELECTRIFIED EXIT DEVICE WITH OFFSET PULL TO BE INSTALLED ON LHR LEAF.

REMOVE EXISTING VESTIBULE-MOUNTED PUSH BUTTON AND REPLACE WITH NEW DOUBLE BUTTON (LCN 8310-855).

PERMANENT CORES BY OWNER.

Operational Description


DOORS NORMALLY CLOSED AND LOCKED. VALID CARD FROM VESTIBULE OR PUSH BUTTON FROM OFFICE TO RETRACT LATCH ON ACTIVE LEAF, ALLOWING ENTRY. MECHANICAL ENTRY BY KEY. FREE EGRESS THROUGH EITHER LEAF BY INSIDE PUSH BARS.

AUTOMATIC OPERATION OF ACTIVE LEAF BY WALL-MOUNTED ACTUATORS. COORDINATE WIRING OF VESTIBULE ACTUATOR WITH ACCESS SYSTEM SO IT IS ONLY ENABLED WHEN DOOR IS UNLOCKED. INSIDE BUTTON TO RETRACT LATCH AND OPEN DOOR AT ALL TIMES.

Hardware Set 02 - (SINGLE OFFICE DOOR)


3	EA	HINGE	58B1 4.5 X 4.5 NRP	652	IVE
1	EA	CLASSROOM SECURITY	ND75 RHO XN12-035	626	SCH
1	EA	WALL STOP	WS408407CVX	630	IVE
3	EA	SILENCER	SR4	630	IVE

PERMANENT CORES (BEST SFIC) FURNISHED BY OWNER.

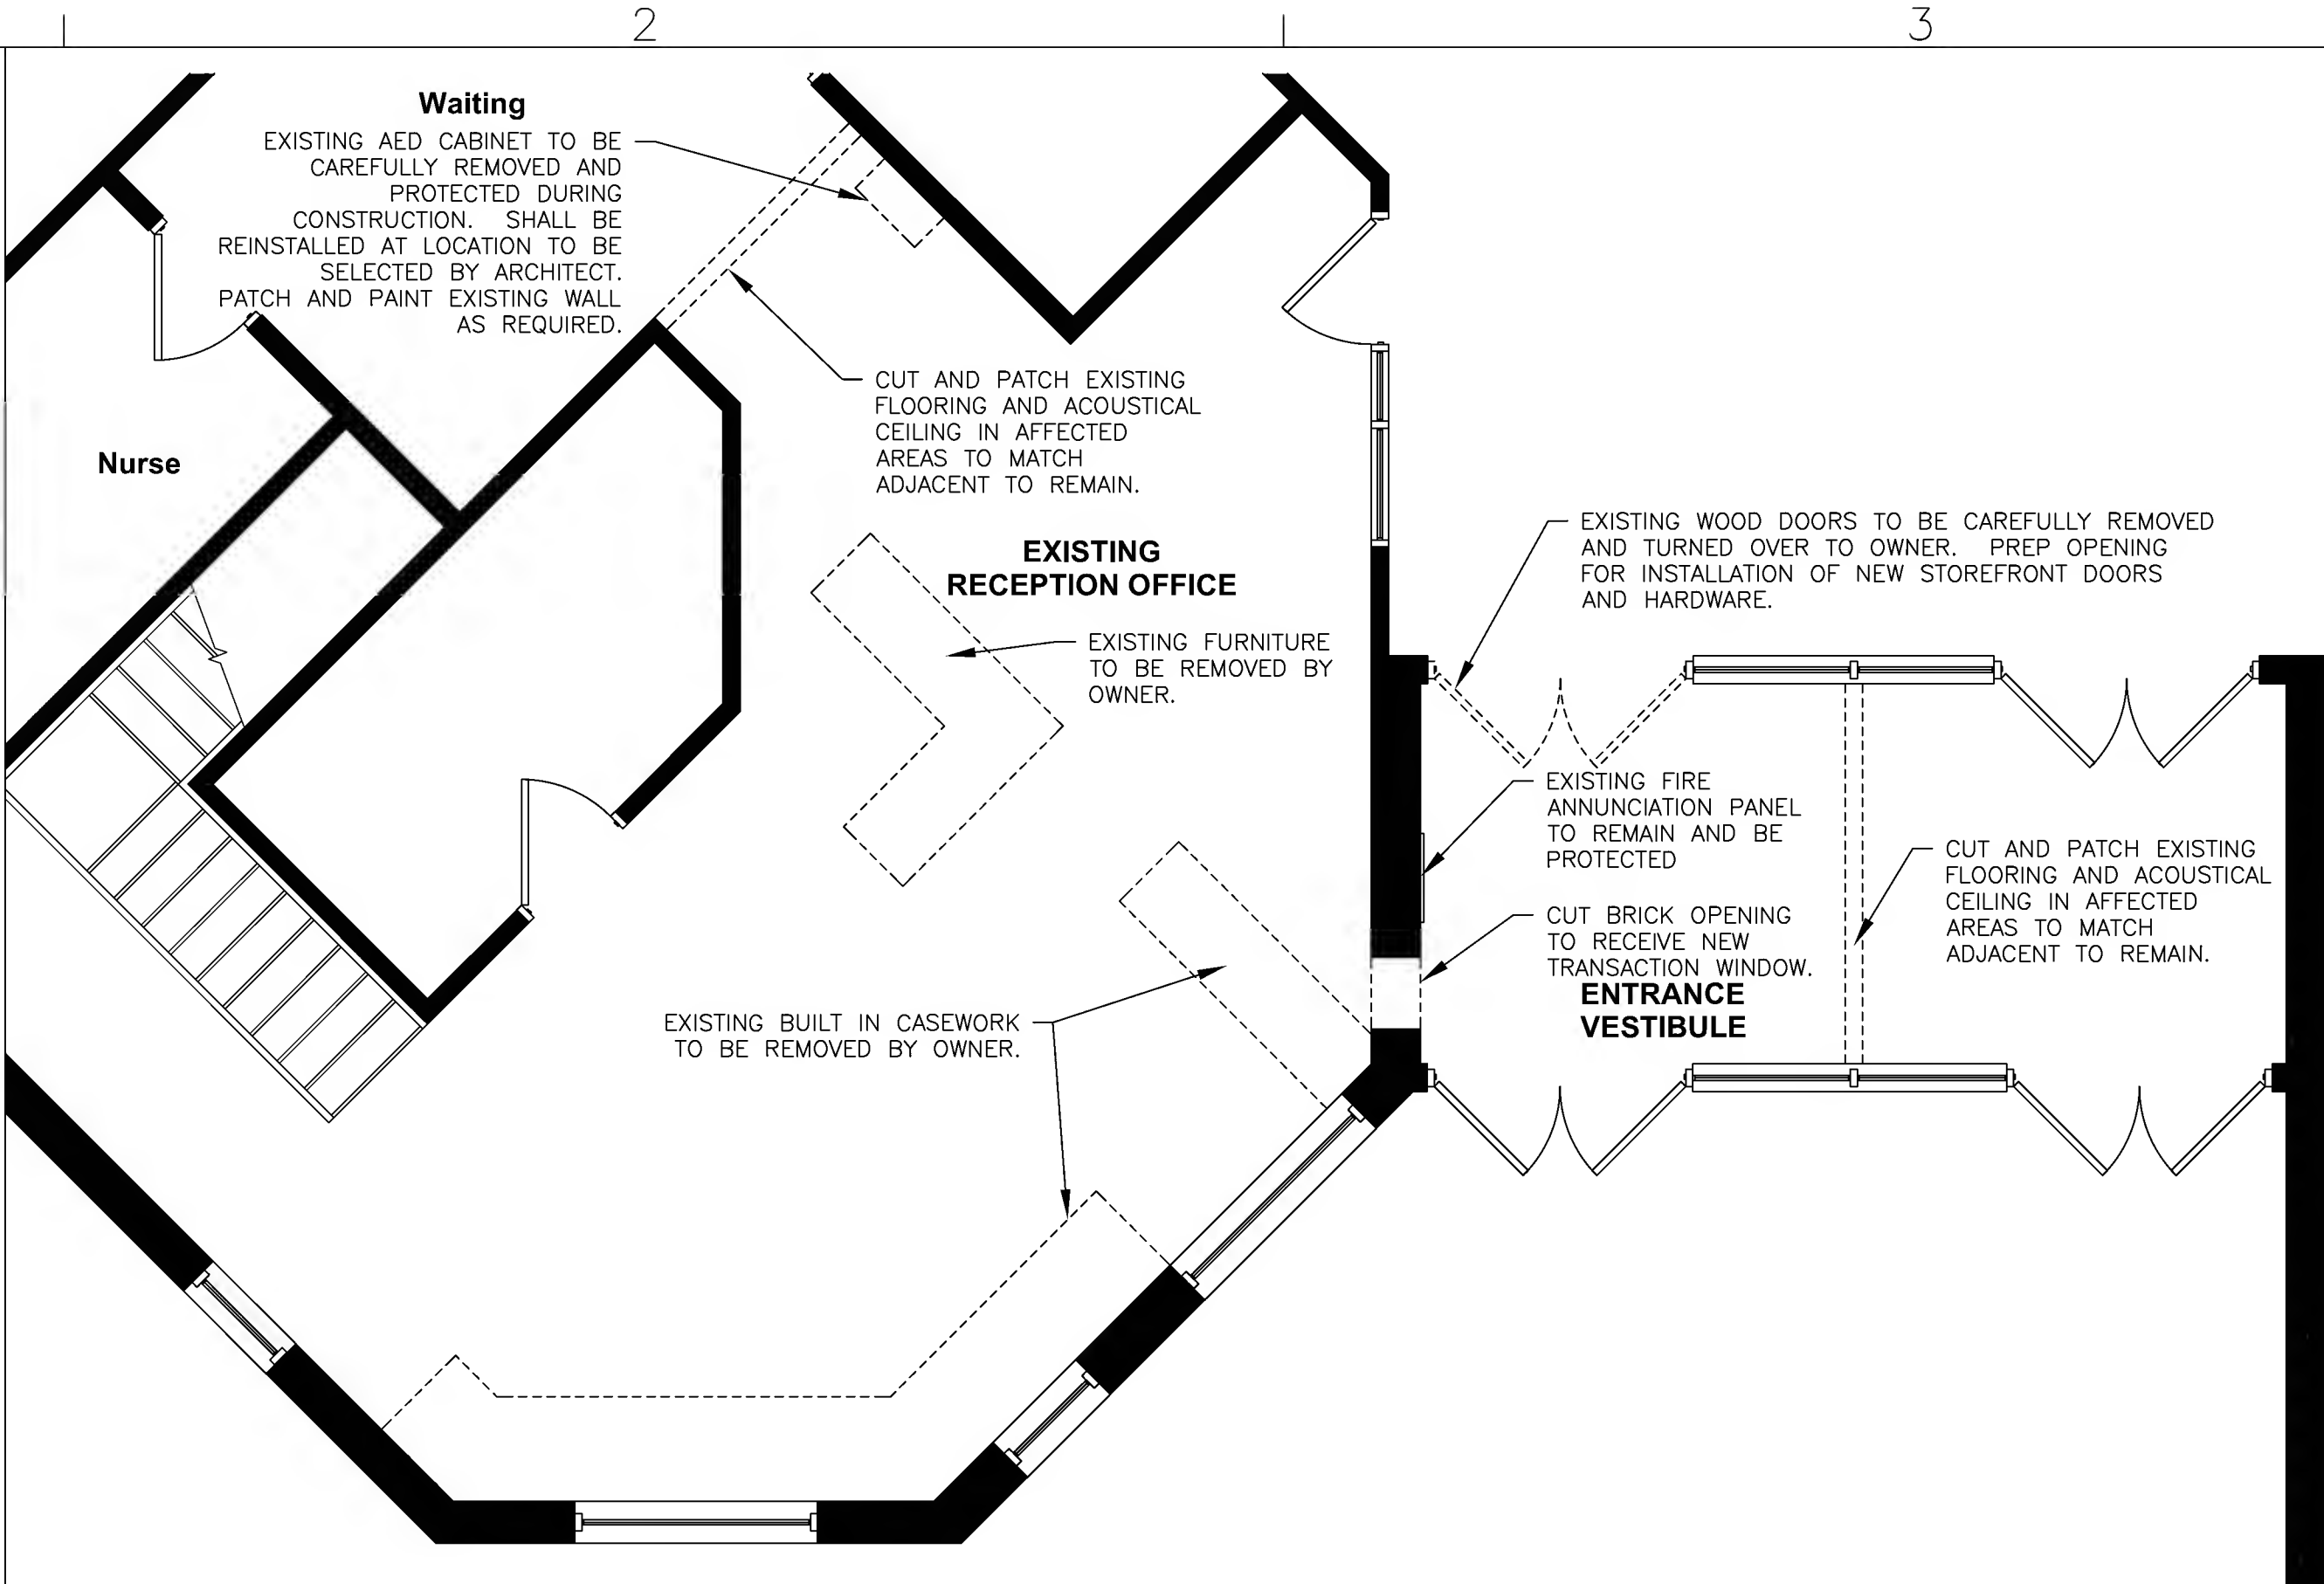







1 SELECTIVE DEMOLITION PLAN

1/4" = 1'-0"

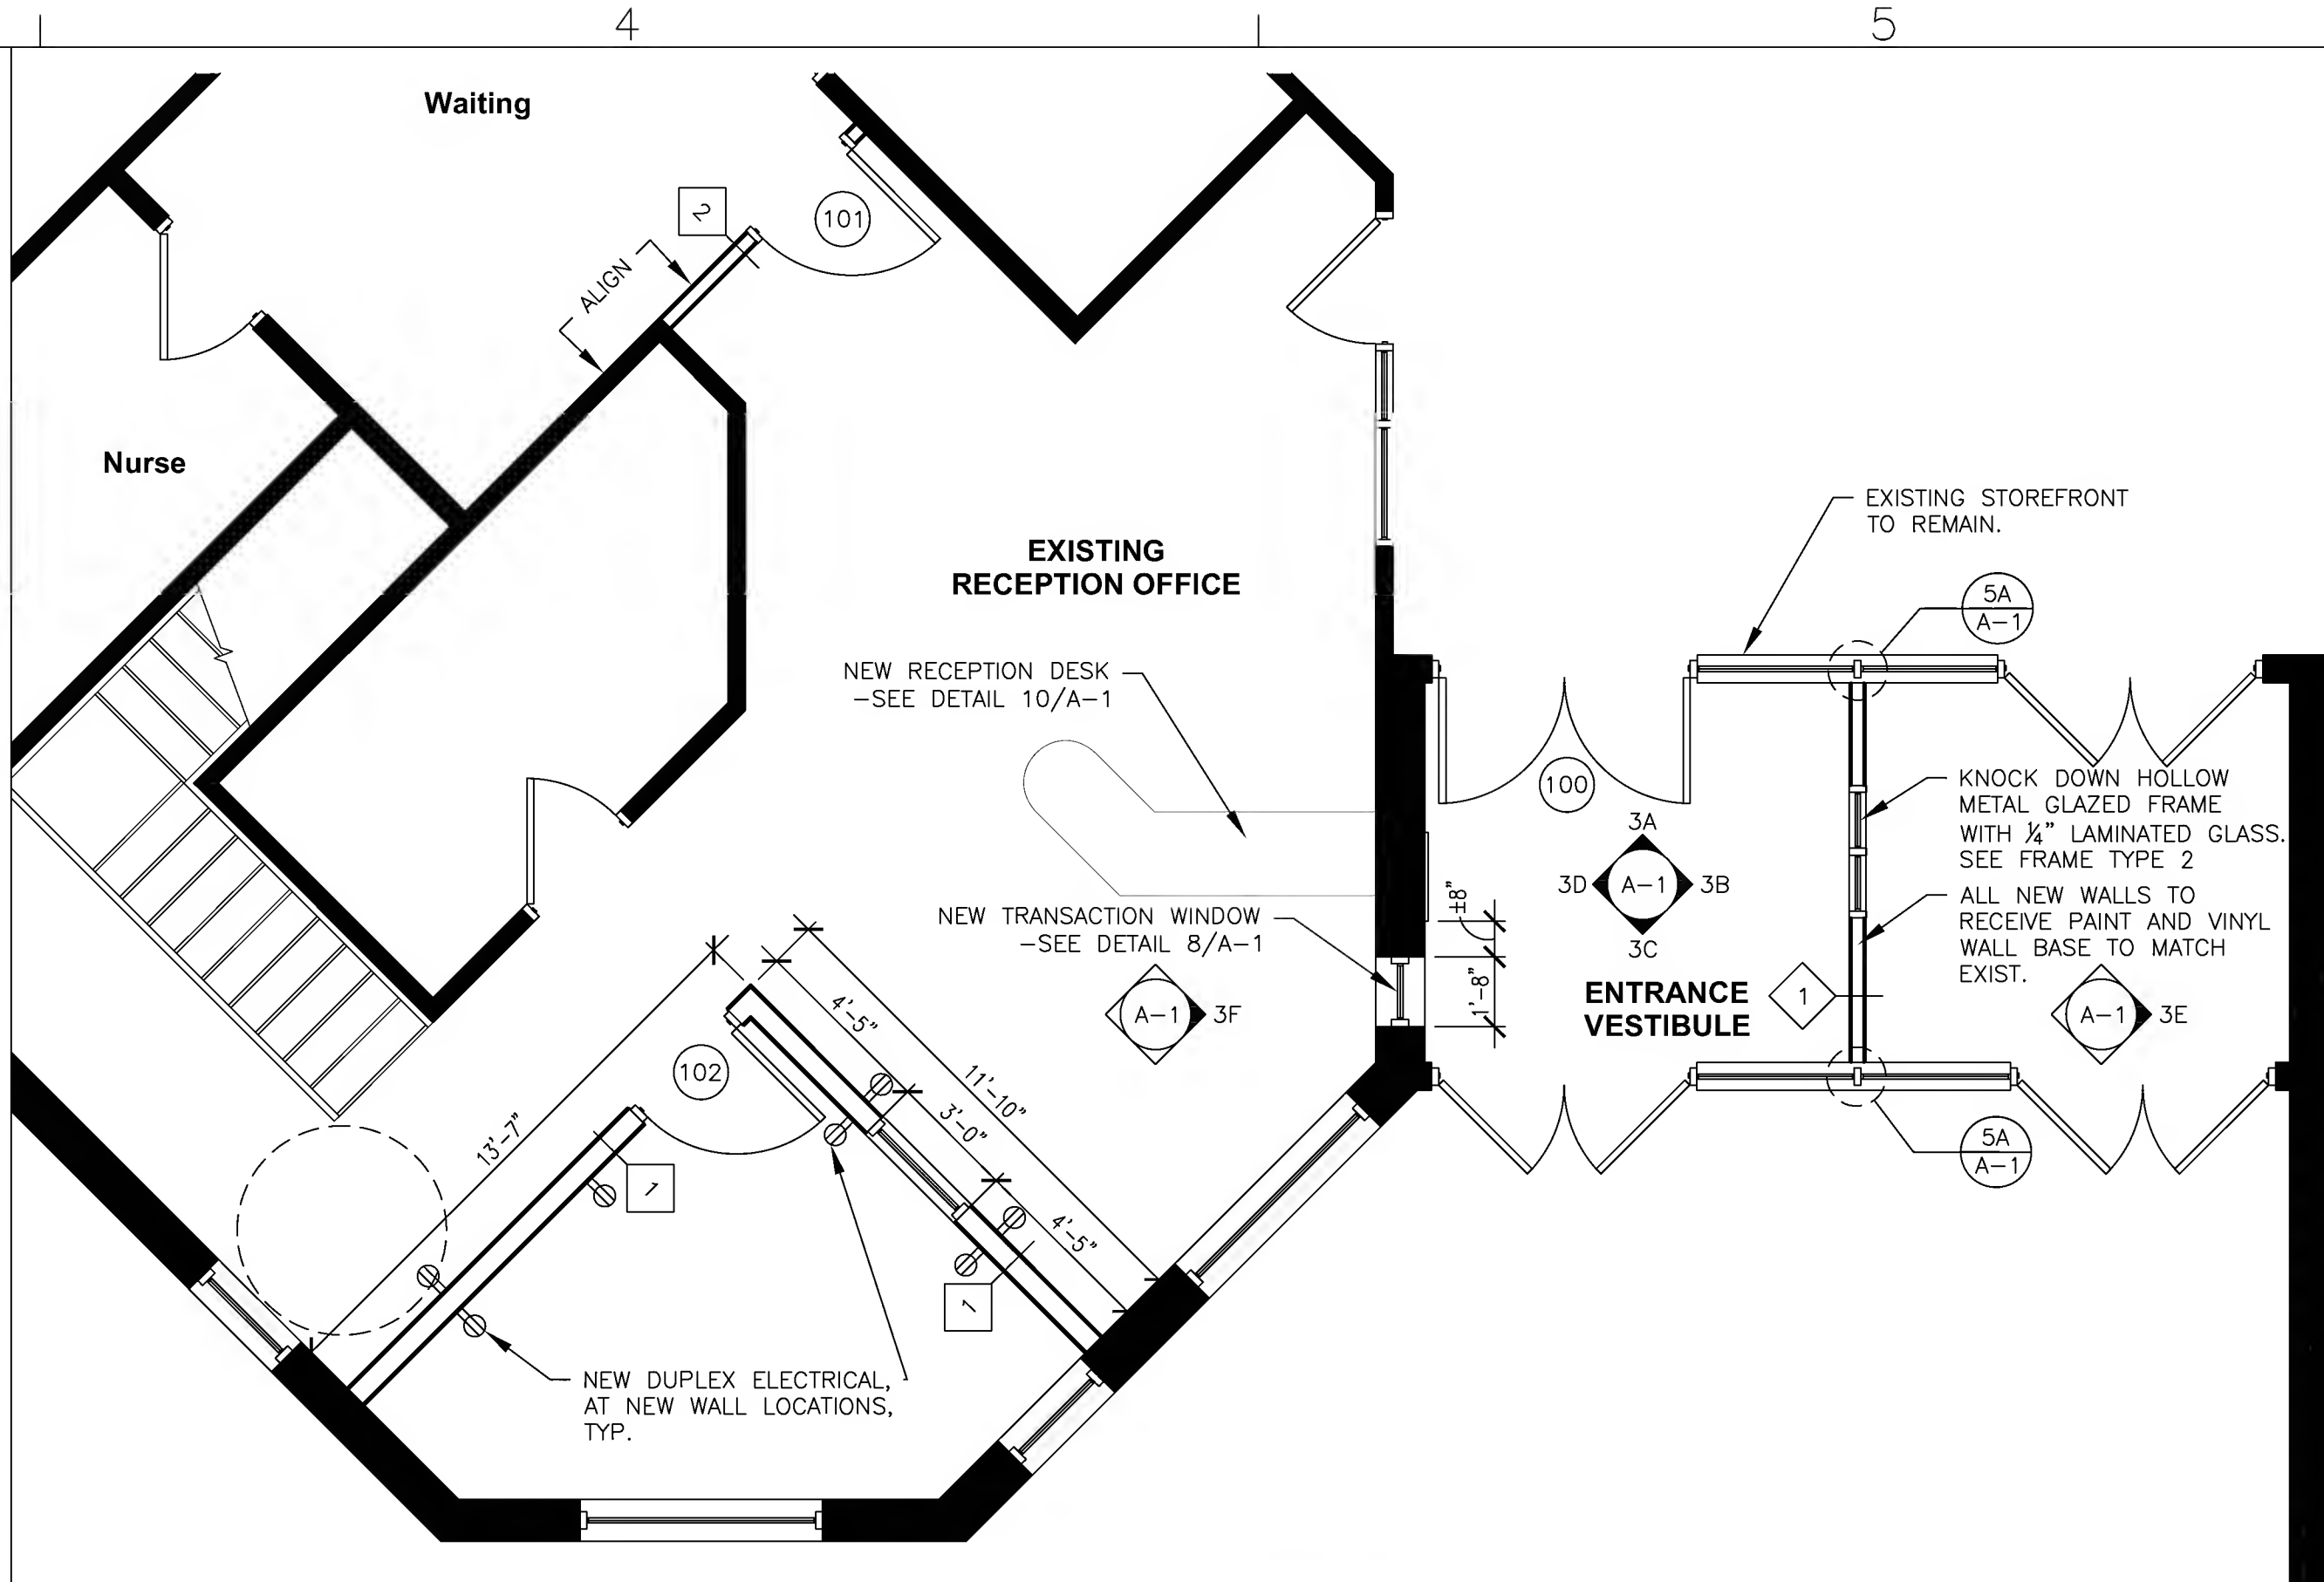


2 PROPOSED FLOOR PLAN

1/4" = 1'-0"

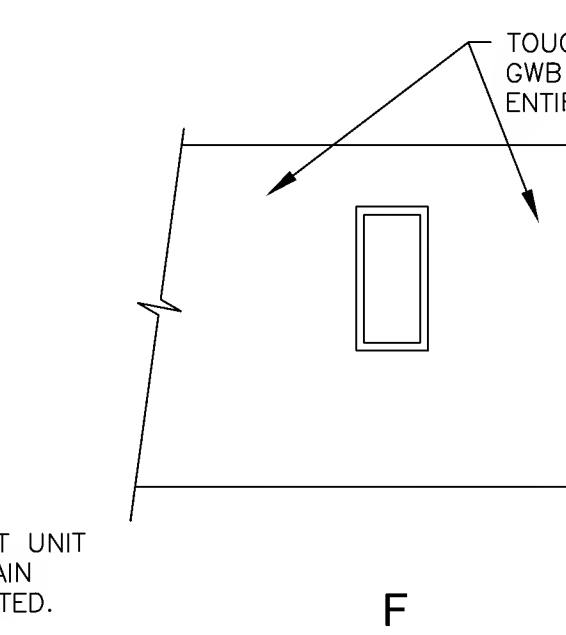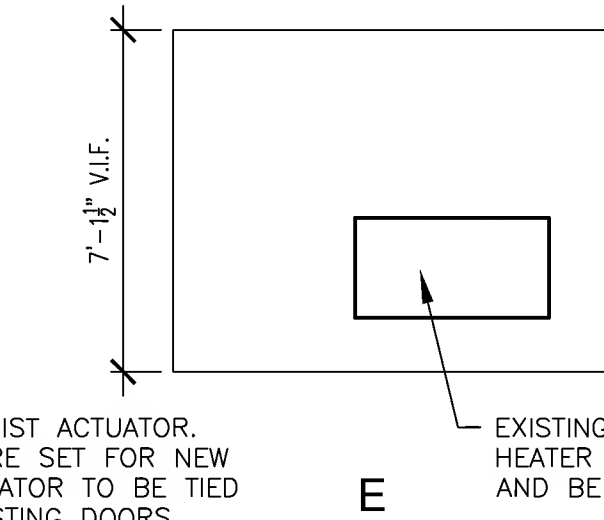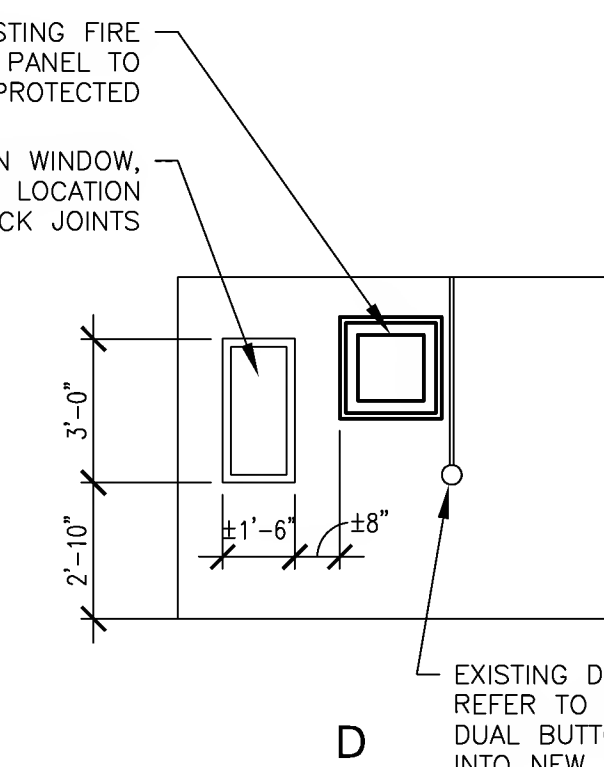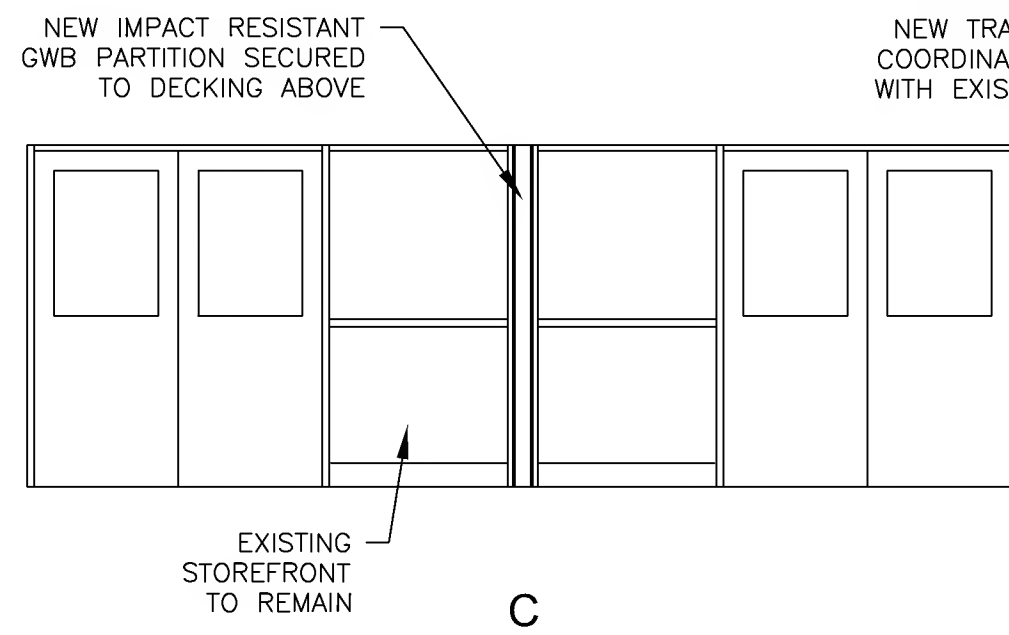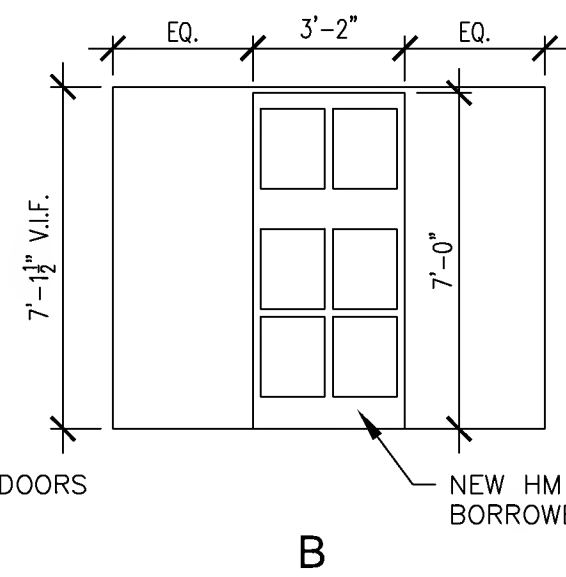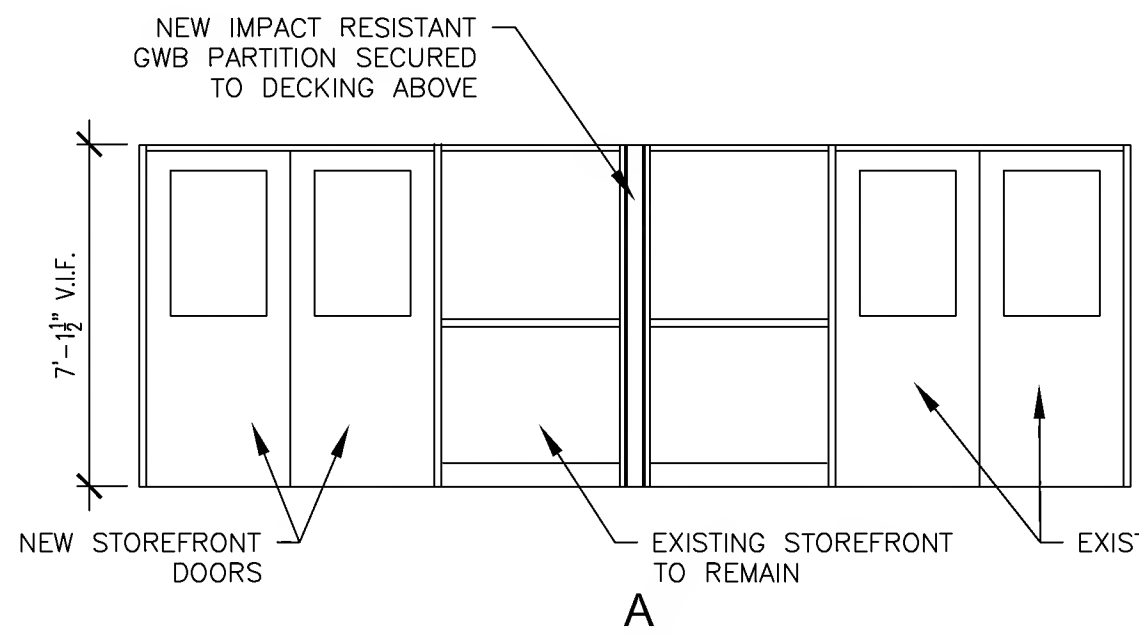





3 VESTIBULE ELEVATIONS

1/4" = 1'-0"

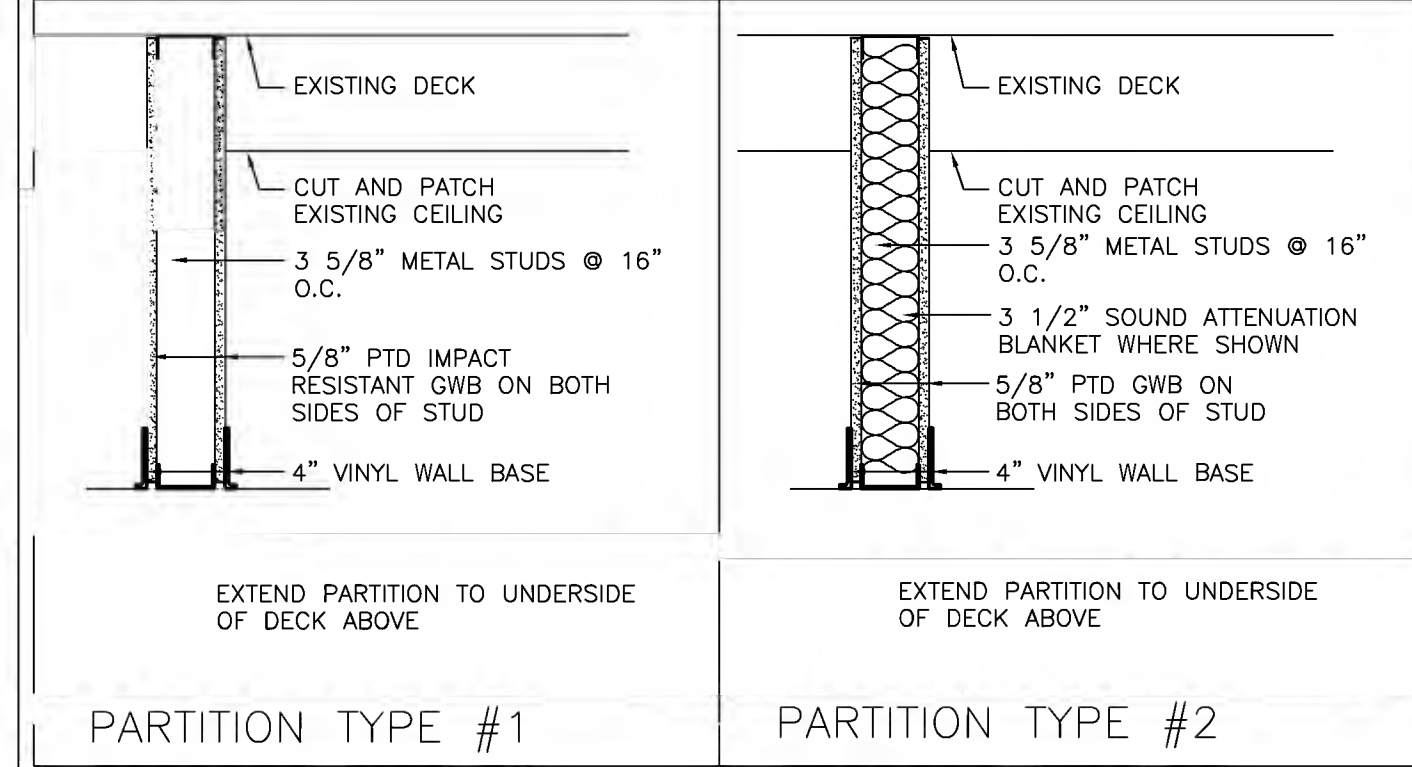

6 PARTITION TYPES

1" = 1'-0"

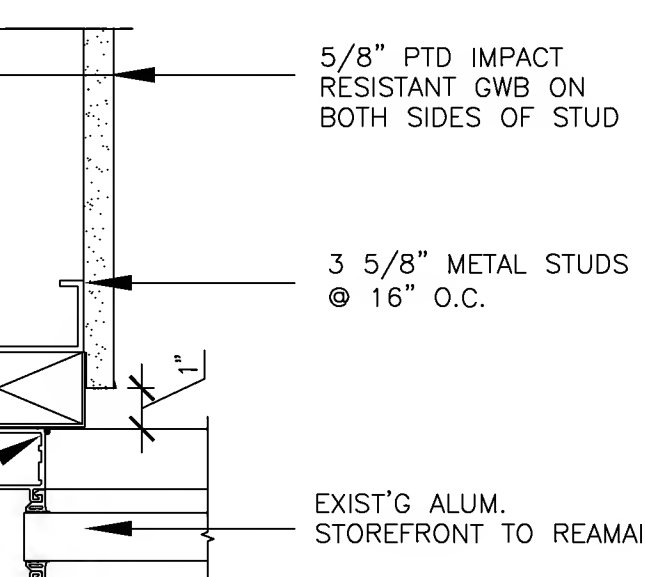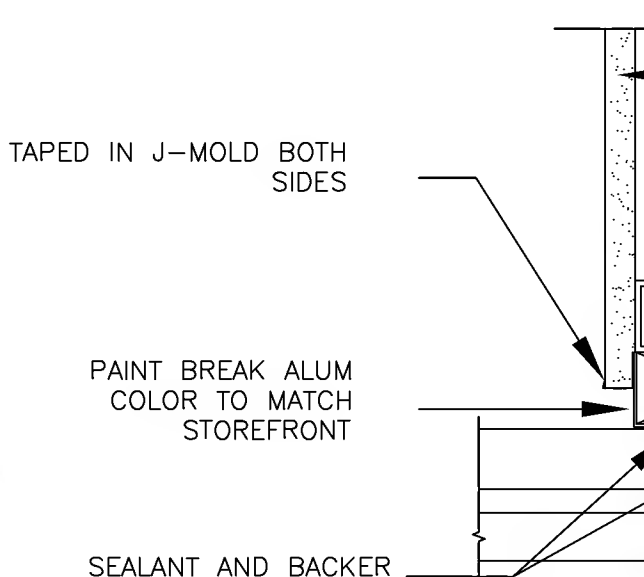
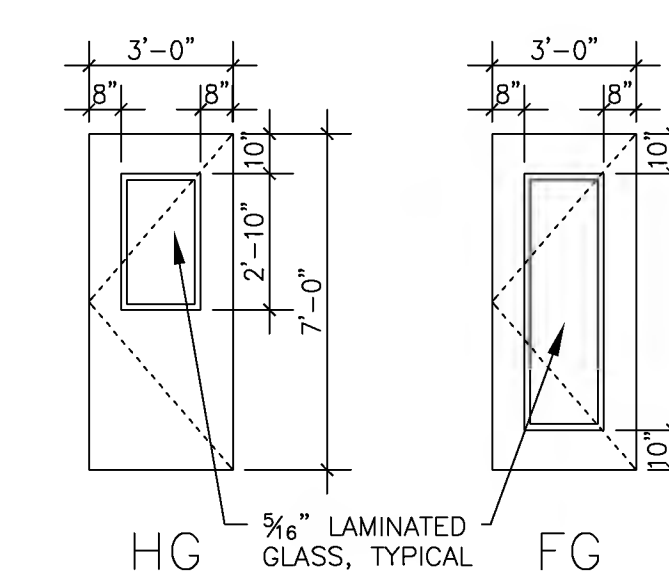
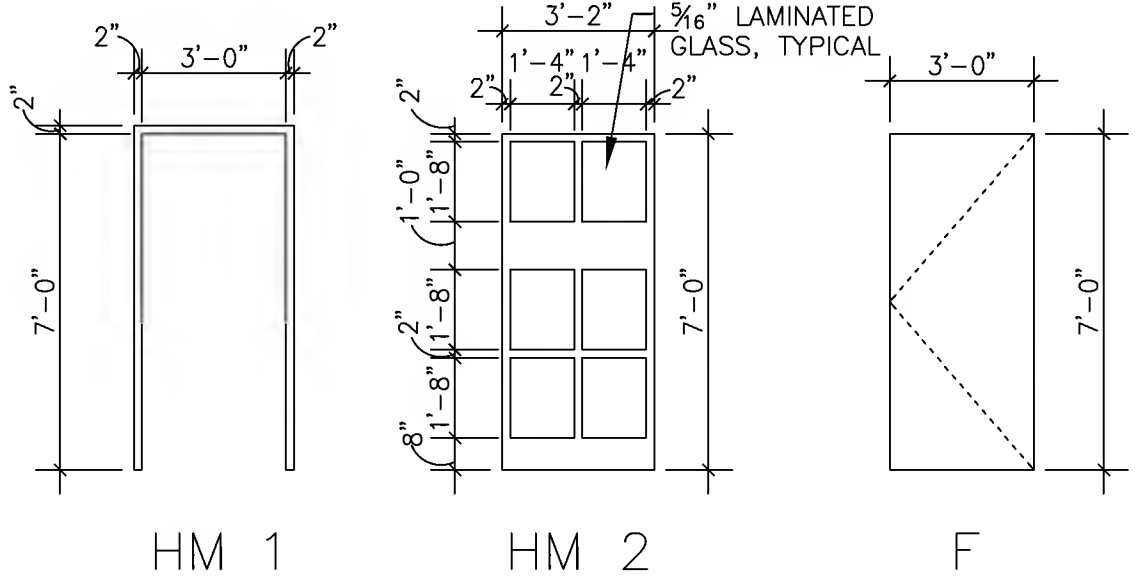


4 DOOR AND FRAME TYPE

1/4" = 1'-0"

5 WALL DETAIL




3" = 1'-0"

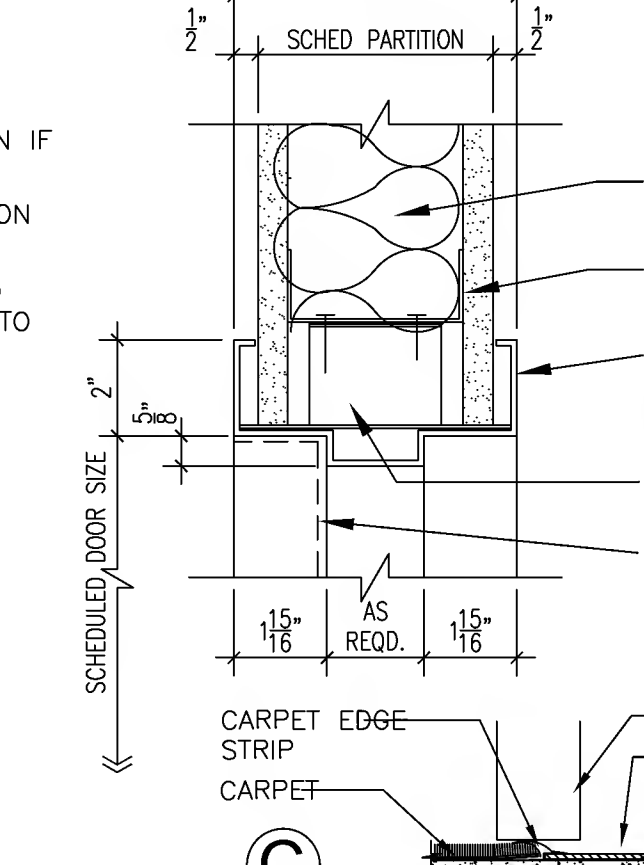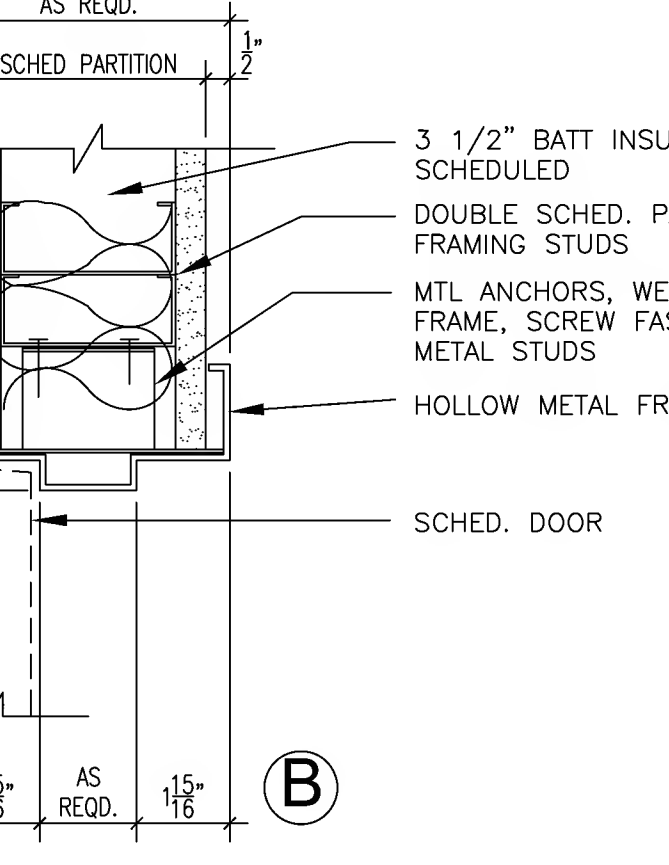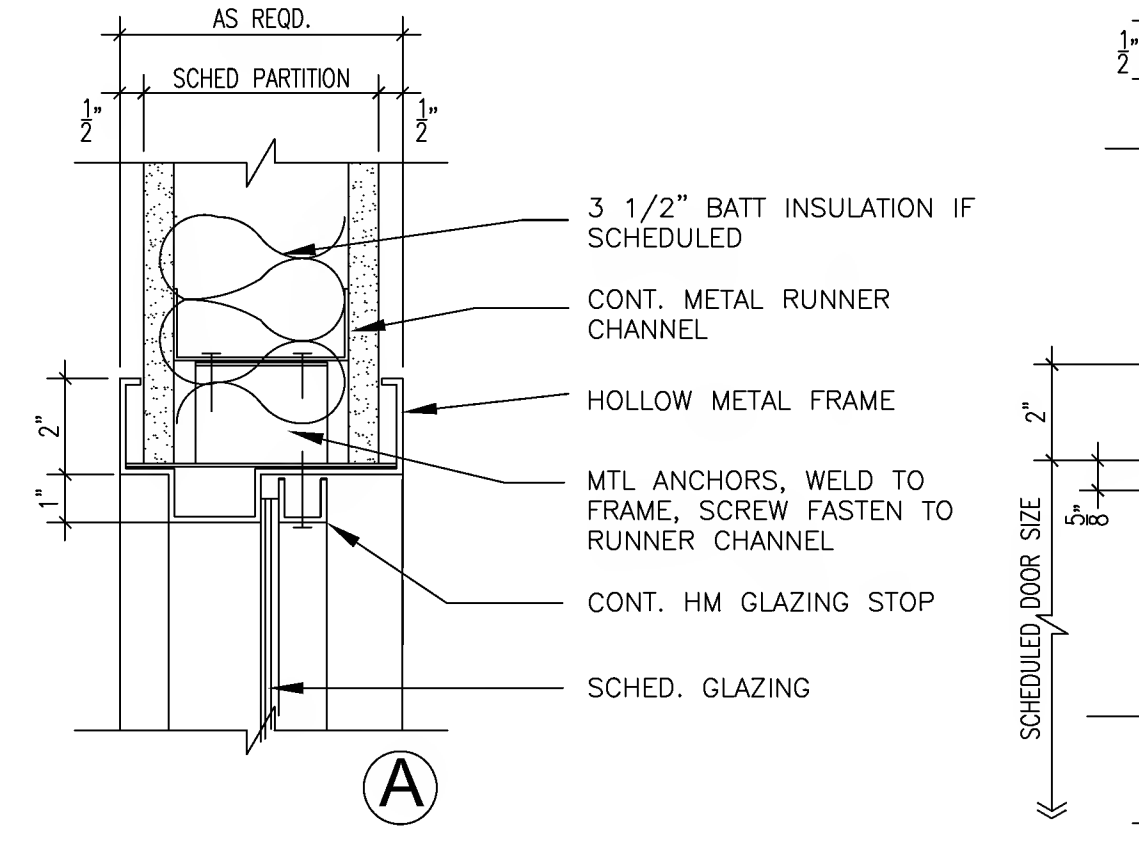

7 DOOR FRAME DETAIL

3" = 1'-0"

- NOTES:
- UL LISTED LEVEL 3 BULLET RESISTANT COMPOSITES
 - NATURAL VOICE SPACERS
 - 16 GA. PRIME PAINTED STEEL FRAME
 - UL LISTED BULLET RESISTANT GLAZING
 - REMOVABLE STOP 1" x 1"
 - FIELD DRILL HOLES AND SET ANCHORS AFTER CORRECTLY POSITIONING BOTH HALVES OF SPLIT FRAME
 - STAINLESS STEEL SHELF
 - 16 GA. STAINLESS STEEL DIP TRAY
 - 20 GA. STAINLESS STEEL CAP
 - SHM AS REQUIRED

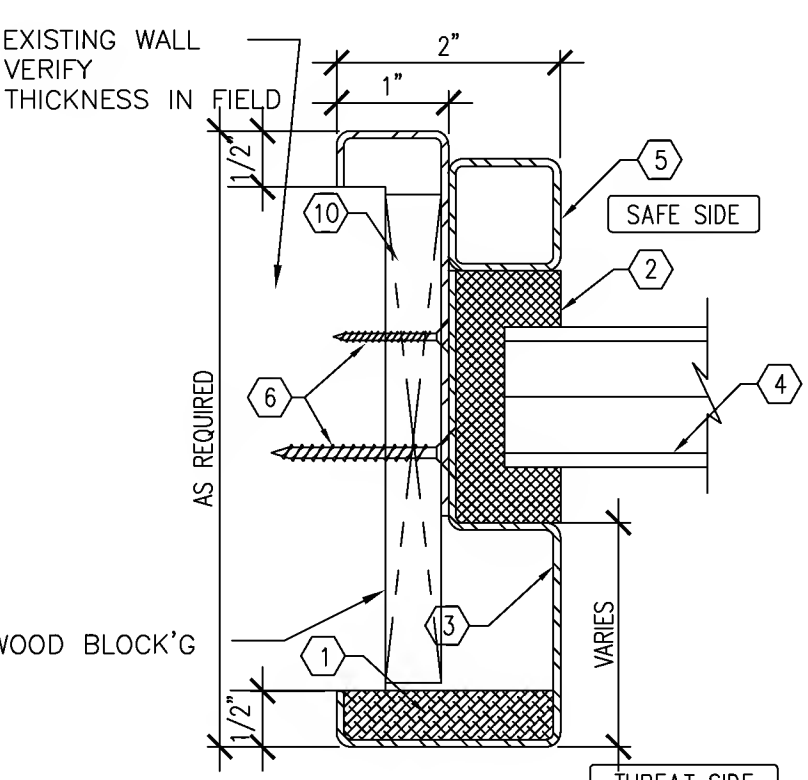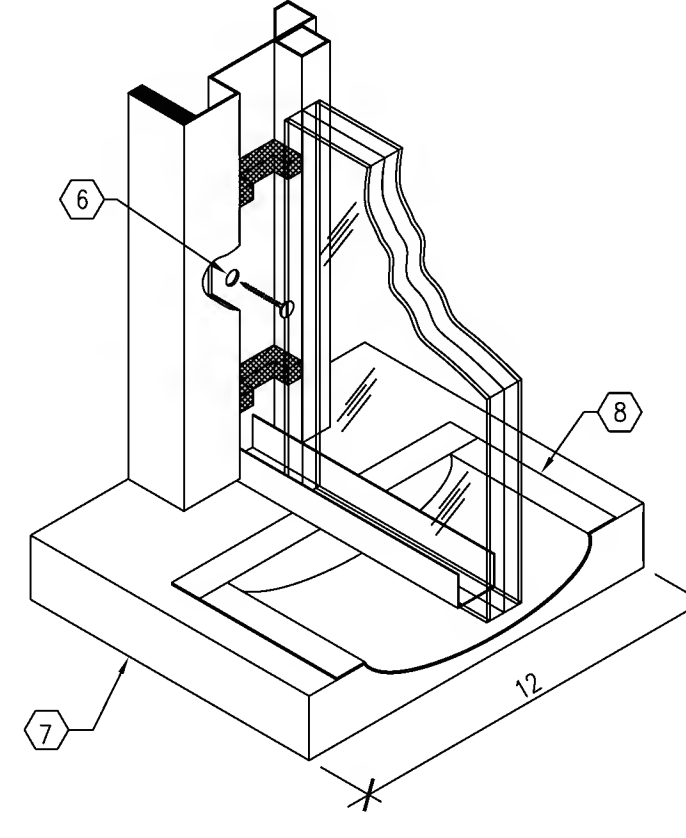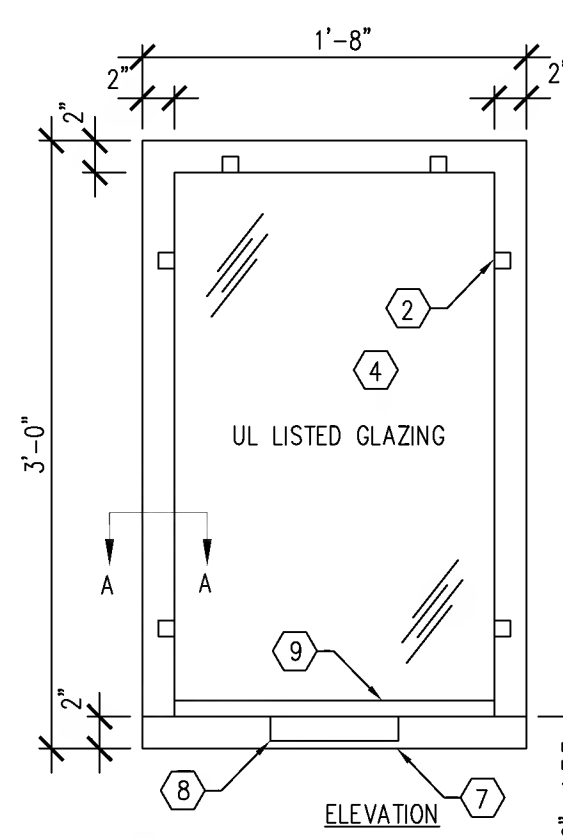

8 TRANSACTION WINDOW DETAIL

N.T.S.

10 RECEPTION DESK

1" = 1'-0"

DOOR SCHEDULES — SEEKONK SCHOOLS																
DOOR NUMBER	DOOR					FRAME					FIRE RATING (MIN)		HARDWARE		REMARKS	
	WIDTH	HEIGHT	THICKNESS	MATERIAL	FINISH	SEE DOOR ELEVATIONS	MATERIAL	FINISH	TYPE — SEE FRAME ELEV.	HEAD DETAIL	JAMB DETAIL	SILL DETAIL	MINUTES	GLAZING		HARDWARE SET NO.
DOOR SCHEDULE — HIGH SCHOOL																
100	2@3'-0"	7'-0"	1 3/4"	ALUM.		HG	EXISTING STOREFRONT SYSTEM TO REMAIN						SECURITY VESTIBULE		1	
102	3'-0"	7'-0"	1 3/4"	WD	NATURAL FINISH	FG	HM	PAINTED	1	7B/A-1	7C/A-1	7C/A-1			2	UNDERCUT DOOR 1"
103	3'-0"	7'-0"	1 3/4"	WD	NATURAL FINISH	F	HM	PAINTED	1	7B/A-1	7C/A-1	7C/A-1			2	—
EXISTING DOORS TO REMAIN																
E																
NOTES:																

9 DOOR SCHEDULE

N.T.S.

D·R·A

Drumme
Rosane
Anderson,
Inc.

235 Bear Hill Road
4th Floor
Waltham, MA
02451

617-964-1700
fax 617-964-1701
info@draws.com

**OTTOSON MIDDLE
SCHOOL
VESTIBULE &
ADMIN OFFICE
IMPROVEMENTS**

Arlington,
Massachusetts

**FLOOR PLANS,
ELEVATIONS,
SCHEDULES AND
DETAILS**

Scale: VARIES
Job No.17010.00
Drawn By:MRH
Date: 06/07/17

A-1